


**PRESSURE SENSITIVE  
ADHESIVE TAPES  
THERMAL MANAGEMENT**

RELIABLE STRONG BONDING



**DISIPA**  
**HEAT S.L.**

C/PENEDES 47  
POL. IND. CAN CASABLANQUES  
08192 SANT QUIRZE DEL VALLES  
TEL. (34)935115052 [www.disipa.net](http://www.disipa.net)

# PSA TAPES THERMAL MANAGEMENT

RELIABLE STRONG BONDING




## TYPES

- Acrylate or silicone
- Dielectric or non dielectric
- With or without dielectric polymer
- Quick tack or freely repositioned
- Hard, soft or very soft
- High, medium or low conformity
- Without or with UL VO
- Adhesive combinations


## PROPERTIES

- High thermal conductivities (0.4 to 2.2 W/mK)
- Low thermal resistances (0.2 to 0.8 °C-inch<sup>2</sup>/W)
- High breakdown voltages (> 2 kV (AC))
- Wide thickness range 0.10 to 0.25 mm
- High shear and peel off strengths
- High temperature resistance and reliability

Please contact us as your development partner.

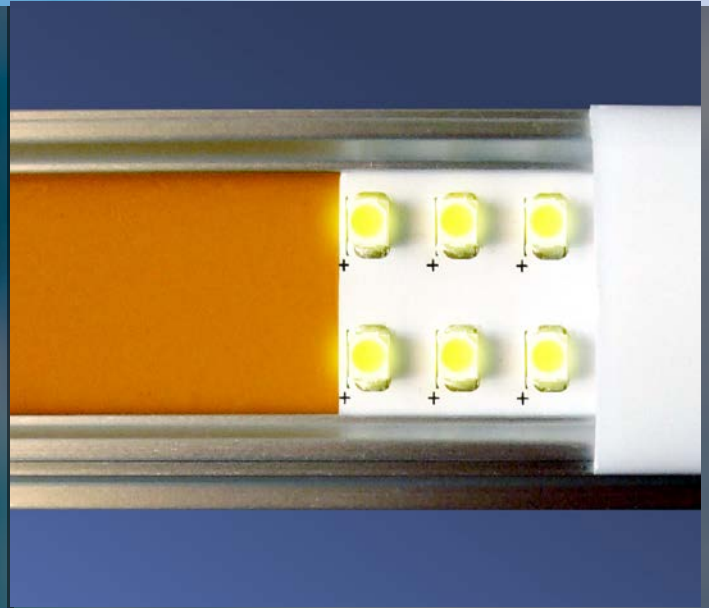


## CONSTRUCTION

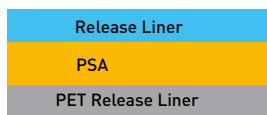

### Sheet

Double release liner used for punched parts




### Roll

Single release liner and self wound rolls of a designated width


- Manufactured by large and small coating units
- Processed by slitting, die and rotary punching

## ASSEMBLY SCHEME

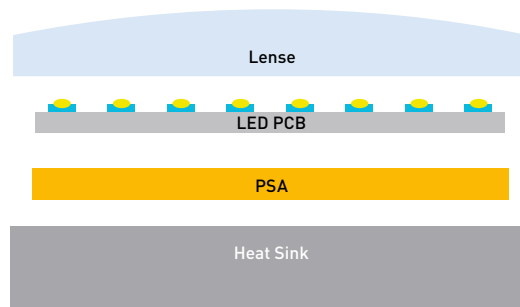

## PRODUCTS


### ΔT DATA

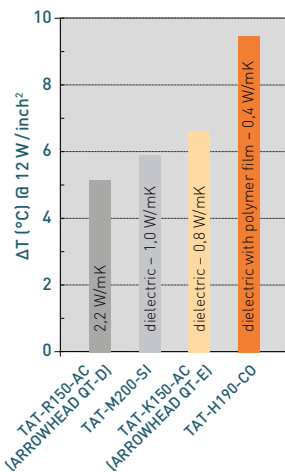

More Products

[www.arrowheadthermal.com](http://www.arrowheadthermal.com)

### RELIABILITY

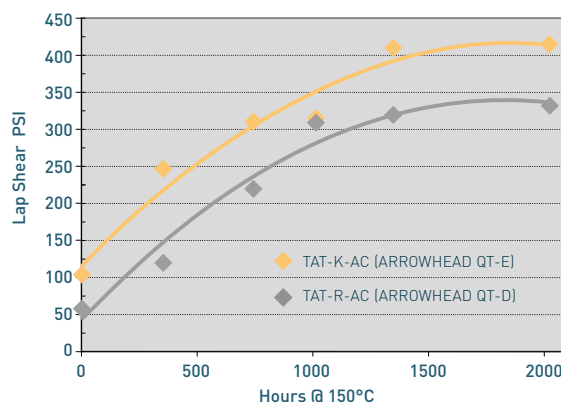

HALA is  
Partner of



ARROWHEAD  
Thermal Products

All technical data and information are without warranty and believed to be reliable and accurate. Since the products are not provided to conform with mutually agreed specifications and their use and processing, Release 9/2014 are unknown we cannot guarantee results, freedom from patent infringement, or their suitability for any application. Product testing by the applicant is recommended. We reserve the right of changes.